
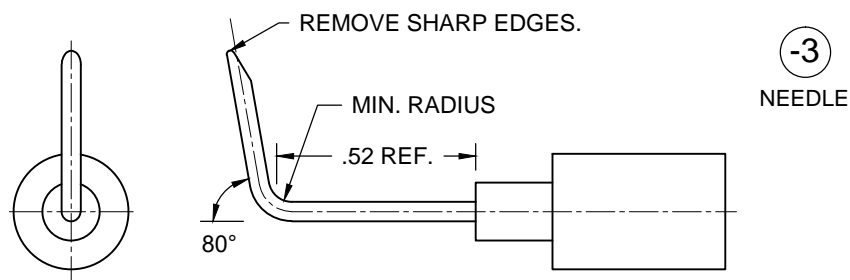


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.


REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVE

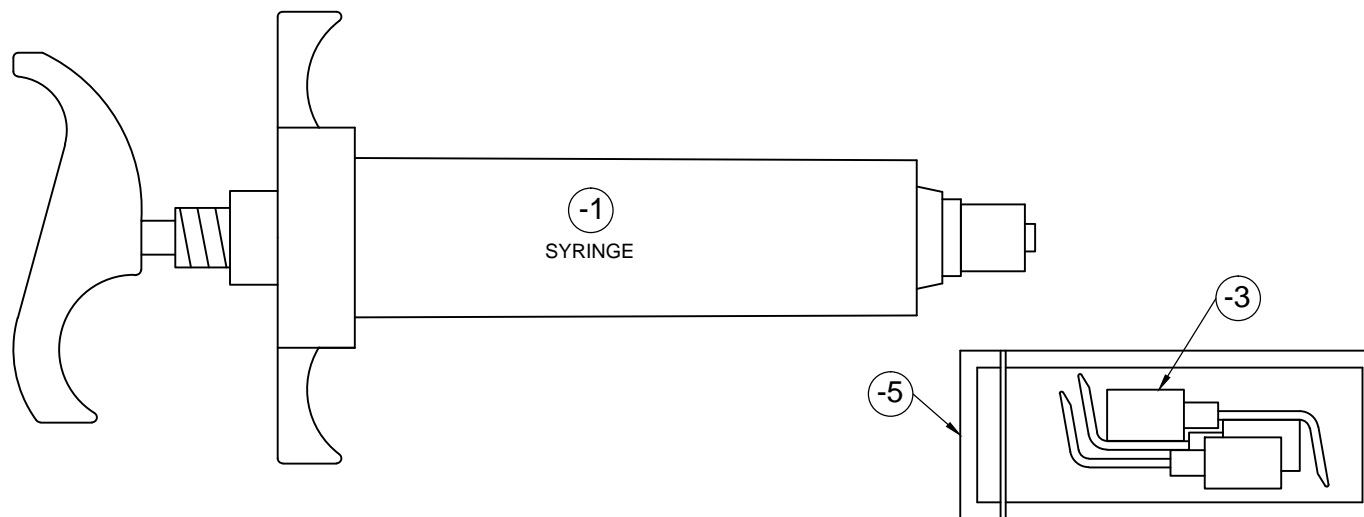

NOTES

1. ALTER -3 NEEDLE AS SHOWN.

ASSY QTY	ASSY QTY	B/O	PART #	UNIT QTY	DESCRIPTION	MATERIAL	B/O INFORMATION OR SPECIFICATIONS
		B/O	-1	1	SYRINGE	NYLON	20 ml JEFFERS LIVESTOCK #C6-L3
		B/O	-3	3	MONOJECT DISPOSABLE NEEDLE	ALUMINUM HUB	18 ga x 1 JEFFERS LIVESTOCK #S7-D5 (NEEDS MODIFIED)
		B/O	-5	1	PLASTIC VIAL	POLYPROPYLENE	Ø1 x 2-7/16 MCMaster-CARR #5274T661
		B/O		1	O-RINGS		JEFFERS LIVESTOCK #C6-L4
	ASSY #						

 RED BARN MACHINE	
TITLE T/R DRIVE SHAFT BEARING LUBRICATION TOOL	
DWG NO. RBPA003	REV
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	
TOLERANCES ON: DECIMALS: .XXX ± .005 XX ± .01 X ± .1 METRIC REF.: .XXmm ± .1mm FRACTIONS ± 1/32 ANGLES ± 5°	DRAWN BY: PERRITT APPROVED: <i>D Weid</i> HEAT TREAT FINISH SPEC
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR. 015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING	USED ON MODEL BEL 206A & B
SCALE NTS	DATE 10-6-10
SHEET 1 of 1	